


## COURSALIS 1500 E (509615000B)

### GENERAL DATA



#### HIGH PERFORMANCE AIR CURTAIN FOR TERTIARY WITH HEATING

Exclusive arch design, light and superfine  
 High performance and low sound level  
 Metallic housing with paint finish in white colour  
 380V 50Hz motor  
 Equipped with electrical coil

Metallic impeller  
 Includes external control by remote control  
 Designed for horizontal mural installation  
 With operating indicator LED (ambient or heating, air velocity and stop motion)  
 Mounting brackets on wall  
 Reach up to 3m.  
 The indicated weight does not include the packaging ( $\pm$  2Kg.)

#### APPLICATION


Tertiary sector:

- Airports.
- Schools
- Malls.
- Stores.
- Supermarkets.
- Train stations.
- Hotels.
- Restaurants
- Pubs
- Offices.
- Banks
- Gas stations
- Logistics centers.
- Industries, food industries.
- Hospitals, clinics, health centers.
- Veterinary clinics.
- Refrigerated warehouses.

### TECHNICAL DATA

Fan							
RPM	1400	Approx. weight	24.7 kg	Max. Flow	1800 m <sup>3</sup> /h		
Motor							
Power	5,5 kW	RPM	1400	I max. (400V)	14,474 A	Approx. weight	0 kg


## DIMENSIONS

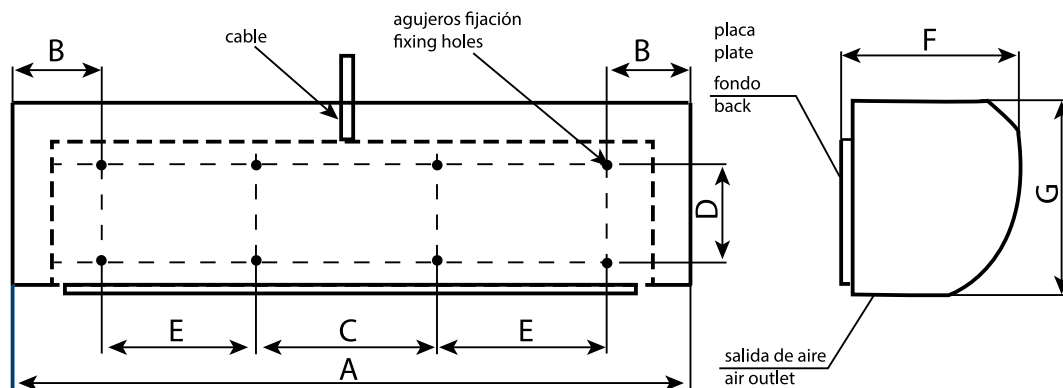

### Dimensions (mm)

A	1650	F	195	G	220
---	------	---	-----	---	-----

## WIRING DIAGRAM

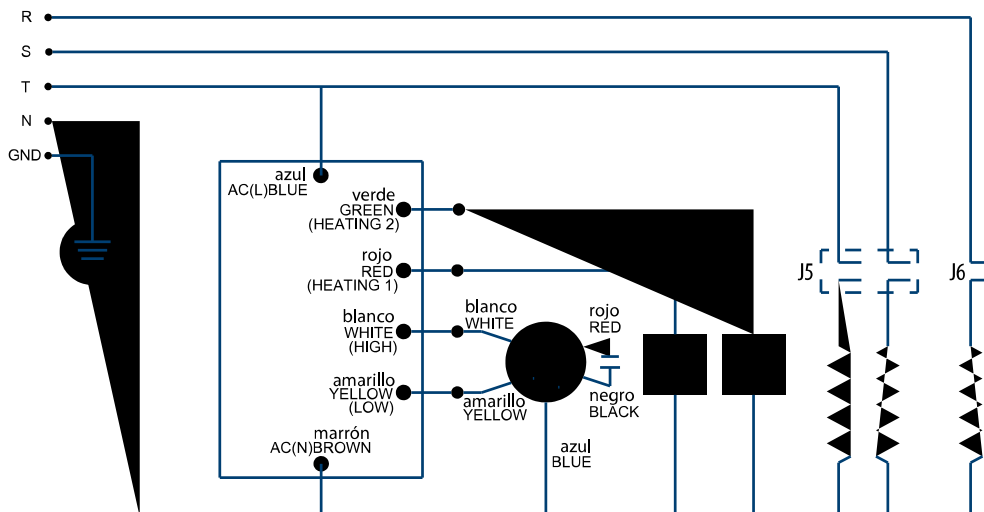

## ACCESSORIES



**SAFETY SWITCH**  
**INT 25 3P A**  
**REF: INT253PA**



**FREQUENCY SPEED CONTROLLER**  
**SFC 400 III 16A \***  
**REF: SFC400III16**



**MAGNETIC CONTACT DOOR SWITCH FOR  
COURSALIS  
MDS Coursalis  
REF: 301034300**