


The ENPRO logo is displayed in a large, bold, black sans-serif font. The letter 'E' is stylized with a blue horizontal bar across its middle. The letter 'O' is replaced by a circular icon consisting of a thick black ring with a white center, and a small black dot is positioned just below the ring.

11/01/2024 13:20:43

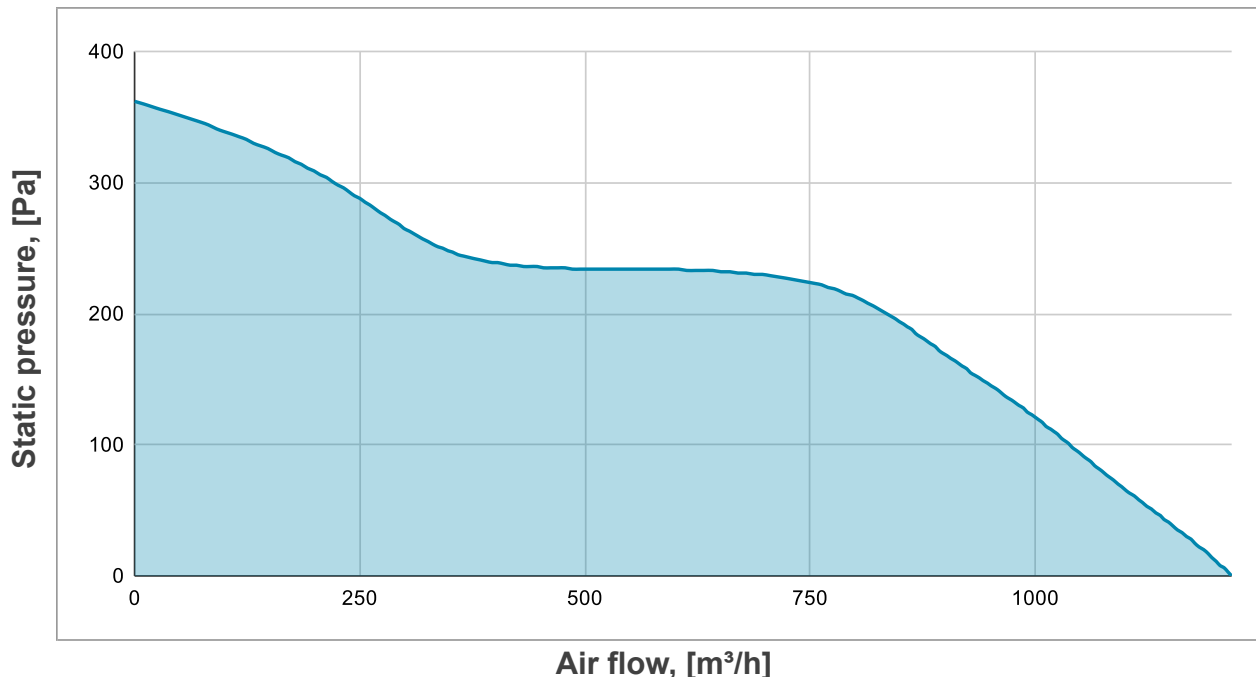

- | Max. efficiency duty point | Unit | Value |
|----------------------------|----------|-------|
| Air flow | m³/h | 748 |
| Static pressure | Pa | 224 |
| Total pressure | Pa | 251 |
| Voltage | V | 230 |
| Frequency | Hz | 50 |
| Current | A | 0.5 |
| El. power consumption | W | 108 |
| Speed | rpm | 2741 |
| SFP | W/(m³/s) | 522 |
| Static efficiency | % | 41 |
| Total efficiency | % | 46 |
| Control voltage | V | - |

Sound power (LW)							Medium Frequency Band			
SWL	dba	Σ	63	125	250	500	1k	2k	4k	8k
Inlet	LWA5	71	36	46	62	68	65	64	60	53
Outlet	LWA6	73	39	47	65	67	70	66	64	56
Case	LWA2	60	41	42	54	51	53	53	44	34

Sound pressure (Lp) at 1m							Medium Frequency Band			
SPL	dba	Σ	63	125	250	500	1k	2k	4k	8k
Inlet	Lp5	60	25	35	51	57	54	53	49	42
Outlet	Lp6	62	28	36	54	56	59	55	53	45
Case	Lp2	47	30	31	43	40	42	42	33	23

Sound pressure (Lp) at 3m							Medium Frequency Band			
SPL	dba	Σ	63	125	250	500	1k	2k	4k	8k
Inlet	Lp5	50	16	25	42	47	44	44	39	32
Outlet	Lp6	53	19	27	44	47	49	45	43	35
Case	Lp2	37	20	22	33	30	32	33	24	13



1