


The ENPRO logo is displayed in a large, bold, black sans-serif font. The letter 'E' is stylized with a blue horizontal bar across its middle. The letter 'O' is replaced by a circular icon consisting of a thick black ring with a white center, and a small black dot is positioned just below the ring.

Max. efficiency duty point	Unit	Value
Air flow	m³/h	2019
Static pressure	Pa	414
Total pressure	Pa	444
Voltage	V	230
Frequency	Hz	50
Current	A	1.9
El. power consumption	W	421
Speed	rpm	2777
SFP	W/(m³/s)	750
Static efficiency	%	52
Total efficiency	%	56
Control voltage	V	-

Sound pressure (Lp) at 1m							Medium Frequency Band			
SPL	dba	Σ	63	125	250	500	1k	2k	4k	8k
Inlet	Lp5	71	43	56	60	66	66	63	58	48
Outlet	Lp6	73	42	56	62	68	69	65	59	49
Case	Lp2	54	40	42	54	48	52	44	35	27

Sound pressure (Lp) at 3m							Medium Frequency Band			
SPL	dba	Σ	63	125	250	500	1k	2k	4k	8k
Inlet	Lp5	61	33	46	51	57	56	53	49	39
Outlet	Lp6	63	33	47	52	58	59	55	49	39
Case	Lp2	45	31	33	44	38	42	34	26	17

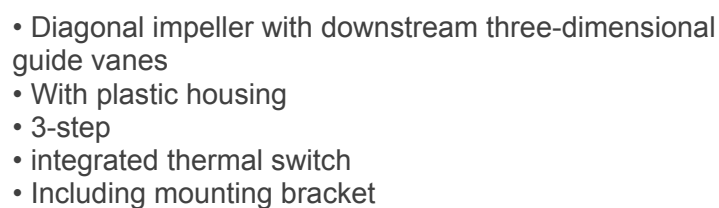

1